


ANNN YANG

CNC LATHE DY-3000C~3600C

BED WIDTH 2000MM HEAVY DUTY

4 GUIDE WAYS

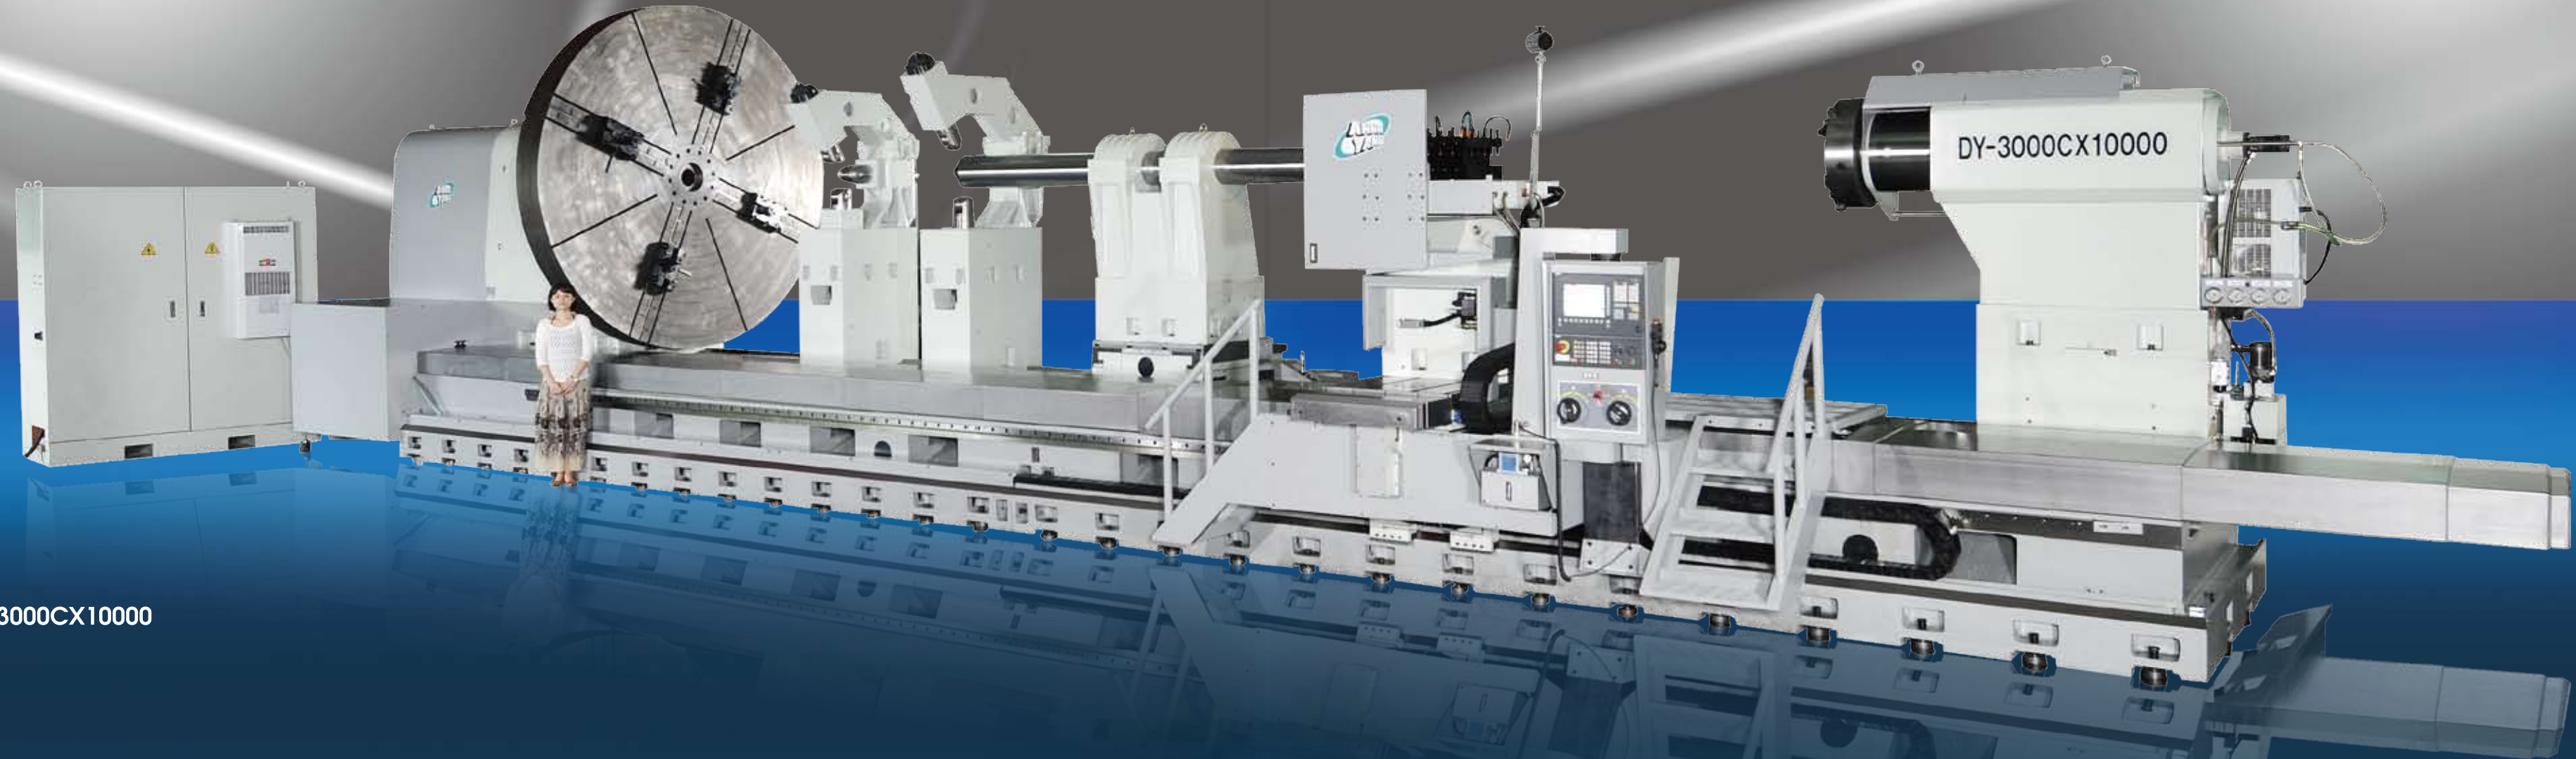

DY-3000CX10000

CNC LATHE DY-3000C~3600C

BED WIDTH 2000MM,4 GUIDE WAYS

MODEL		DY-3000C	DY-3200C	DY-3400C	DY-3600C
Machining capability	Distance between centers	2000mm~4000mm			
	Swing over bed	3000mm	3200mm	3400mm	3600mm
	Swing over cross slide	2600mm	2800mm	3000mm	3200mm
Bed	Width	2000mm			
Main spindle	Spindle nose Spindle bore Spindle speed (rpm)	A2-15, 230mm: 1~300rpm A2-20, 310mm, 1~300rpm A2-20, 360mm: 1~200rpm			
Travel	X axis (Cross travel) Z axis (Longitudinal travel) Y axis (OPT.)	1500mm	1600mm Same as Distance between centers ±100mm, Optional, design according to customer's request	1700mm	1800mm
Motors	Main motor Inverter X axis servo motor Z axis servo motor Oil pump Coolant pump Hydraulic tank pump (optional)	FANUC or SIEMENS spindle motor 100kw ----- A30 servo motor 5.5kw/ 30Nm / 4000rpm A100 servo motor 11kw/ 100Nm / 2500rpm 100W 450W, 6~10bar 3hp (2.2kw)			
Tank capacity	Hydraulic tank (optional) Lubrication pump	20L 8L			
Ball screw	X axis diameter Z axis diameter	63mm 80mm (longer than 8M model we use rack and pinion)			
Tailstock	Quill diameter (rotating quill with spindle nose) Quill travel Quill taper	500mm 500mm MT7			
Measurement	Net weight (approx.)	10 Meter machine about 80 tons			
Workpiece Weight capacity	Chuck only	Chuck+Tailstock	Chuck+1 Steady rest+Tailstock	Chuck+2 Steady rest+Tailstock	
Spindle bore 230mm	10000kg	30000kg	45000kg	60000kg	

* ABOVE SPECIFICATIONS ARE FOR YOUR REFERENCE AND SUBJECT TO CHANGE WITHOUT NOTICE. FOR SPECIAL REQUIREMENTS PLEASE CONTACT US.

www.annnyang.com



Telescopic cover for guide ways



C type steady rest



3000mm chuck with boring mail jaws



Hydraulic tailstock with rotating quill



Boring bar holder



All kinds turret available

www.annnyang.com